

Auxiliary switch block, 2 NO EN 50005 connection from below Screw terminal size S00 For auxiliary and motor contactors !!! Phased-out product !!! Successor is SIRIUS 3RH2 Preferred successor type is >>3RH2911-1MA20<<

### General technical data

<b>Product brand name</b>	SIRIUS
<b>Suitability for use</b>	Contact relay and power contactor
<b>Protection class IP on the front</b>	IP20
<b>Ambient temperature</b>	
• during storage	-55 ... +80 °C
• during operation	-25 ... +60 °C
<b>Mechanical service life (switching cycles) typical</b>	10 000 000
<b>Electrical endurance (switching cycles) at AC-15 at 230 V typical</b>	200 000
<b>Contact reliability of auxiliary contacts</b>	1 faulty switching per 100 million (17 V, 1 mA)
<b>Insulation voltage with degree of pollution 3 at AC rated value</b>	690 V
<b>Surge voltage resistance rated value</b>	6 kV

### Auxiliary circuit

<b>Number of NC contacts for auxiliary contacts</b>	
• instantaneous contact	0
<b>Number of NO contacts for auxiliary contacts</b>	
• instantaneous contact	2
<b>Operating current of auxiliary contacts at AC-12</b>	
• at 24 V	10 A
• at 230 V	10 A
• maximum	10 A
<b>Operating current</b>	
• of auxiliary contacts	
— at AC-14	
— at 125 V	6 A
— at 250 V	6 A
— at AC-15	
— at 24 V	6 A
— at 230 V	6 A
— at 400 V	3 A
• at AC-15 at 690 V rated value	1 A
<b>Operating current</b>	

- of auxiliary contacts at DC-12
  - at 24 V 10 A
  - at 110 V 3 A
  - at 220 V 1 A
- with 2 current paths in series at DC-12
  - at 24 V rated value 10 A
  - at 60 V rated value 10 A
  - at 110 V rated value 4 A
  - at 220 V rated value 2 A
  - at 440 V rated value 1.3 A
  - at 600 V rated value 0.65 A
- with 3 current paths in series at DC-12
  - at 24 V rated value 10 A
  - at 60 V rated value 10 A
  - at 110 V rated value 10 A
  - at 220 V rated value 3.6 A
  - at 440 V rated value 2.5 A
  - at 600 V rated value 1.8 A

#### Operating current

- of auxiliary contacts at DC-13
  - at 24 V 6 A
  - at 60 V 2 A
  - at 110 V 1 A
  - at 220 V 0.3 A
- with 2 current paths in series at DC-13
  - at 24 V rated value 10 A
  - at 60 V rated value 3.5 A
  - at 110 V rated value 1.3 A
  - at 220 V rated value 0.9 A
  - at 440 V rated value 0.2 A
  - at 600 V rated value 0.1 A
- with 3 current paths in series at DC-13
  - at 24 V rated value 10 A
  - at 60 V rated value 4.7 A
  - at 110 V rated value 3 A
  - at 220 V rated value 1.2 A
  - at 440 V rated value 0.5 A
  - at 600 V rated value 0.26 A

#### Installation/ mounting/ dimensions

<b>Mounting type</b>	snap-on mounting
<b>Width</b>	36.5 mm

Height	37.5 mm
Depth	41.5 mm

### Connections/ Terminals

Type of electrical connection for auxiliary and control current circuit	screw-type terminals
Type of connectable conductor cross-sections <ul style="list-style-type: none"> <li>for auxiliary contacts <ul style="list-style-type: none"> <li>finely stranded</li> <li>with core end processing</li> </ul> </li> <li>at AWG conductors for auxiliary contacts</li> </ul>	2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ) 2x (20 ... 16), 2x (18 ... 14)

### Safety related data

Product function Mirror contact acc. to IEC 60947-4-1 <ul style="list-style-type: none"> <li>Note</li> </ul>	Yes with 3RT1
Product function positively driven operation acc. to IEC 60947-5-1 <ul style="list-style-type: none"> <li>Note</li> </ul>	Yes with 3RH1

### Certificates/ approvals

General Product Approval	Functional Safety/Safety of Machinery	Declaration of Conformity
 CCC	 CSA	 UL
 EAC		 EG-Konf.
		<a href="#">Type Examination Certificate</a>

Declaration of Conformity	Test Certificates	Shipping Approval
<a href="#">Miscellaneous</a>	<a href="#">Special Test Certificate</a>	<a href="#">Type Test Certificates/Test Report</a>
	 ABS	 BUREAU VERITAS
		 RMRS

other	Railway
<a href="#">Confirmation</a>	<a href="#">Special Test Certificate</a>

### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)  
<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RH1911-1MA20>

**Cax online generator**



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RH1911-1MA20>


**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RH1911-1MA20>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RH1911-1MA20&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RH1911-1MA20&lang=en)

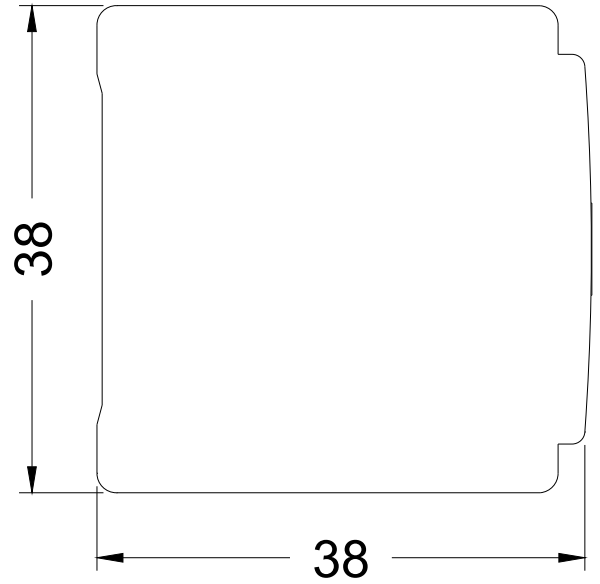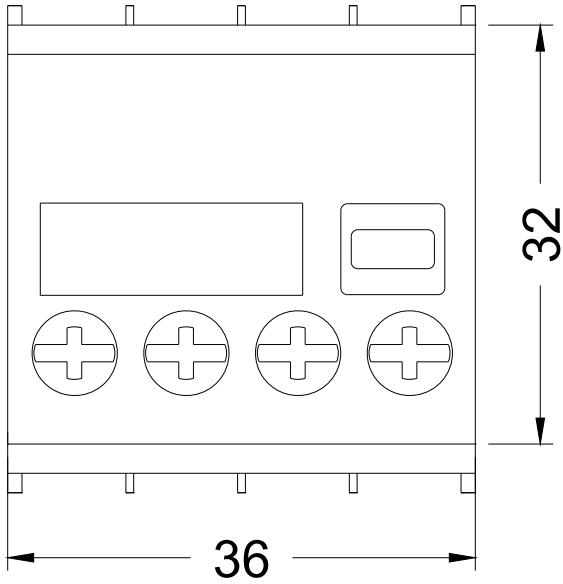

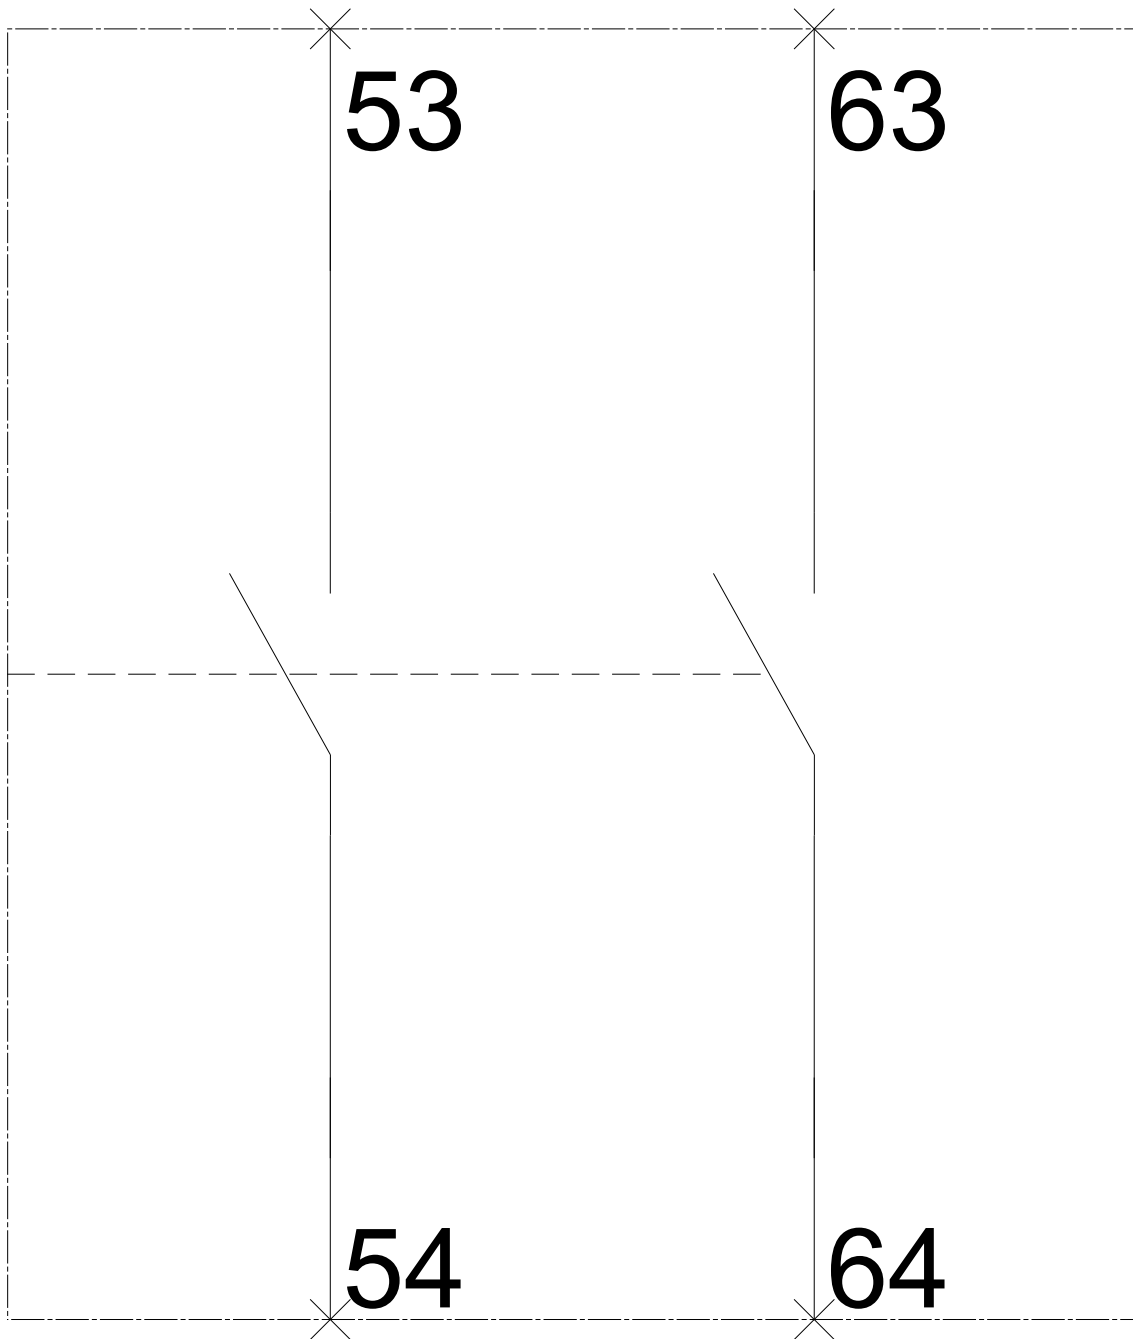

last modified:

04/09/2020