







**Motor-protective circuit-breaker, 3p, Ir=0.63-1A, screw connection**


**Part no.** PKZM0-1  
**Catalog No.** 072734  
**Alternate Catalog No.** XTPR001BC1NL  
**EL-Nummer (Norway)** 4355125

**Delivery program**

|  |   |          |   |   |
|--|---|----------|---|---|
| Product range  |   |          |   | PKZM0 motor protective circuit-breakers up to 32 A  |
| Basic function   |   |          |   | Motor protection  |
|  |   |          |   |   |
| Notes  |   |          |   | Also suitable for motors with efficiency class IE3. IE3-ready devices are identified by the logo on their packaging.                                    |
| Connection technique   |   |          |   | Screw terminals   |
| Contact sequence   |   |          |   |   |
| <b>Max. motor rating</b>   |   |          |   |   |
| AC-3   |   |          |   |   |
| 220 V 230 V 240 V  | P   | kW       |   | 0.12  |
| 380 V 400 V 415 V  | P   | kW       |   | 0.25  |
| 440 V  | P   | kW       |   | 0.25  |
| 500 V  | P   | kW       |   | 0.37  |
| 660 V 690 V  | P   | kW       |   | 0.55  |
| Rated uninterrupted current  | $I_u$   | A        |   | 1   |
| <b>Setting range</b>   |   |          |   |   |
| Overload releases  |  | $I_r$    | A | 0.63 - 1  |
| short-circuit release  |  |          |   |   |
| max.   |   | $I_{rm}$ | A | 15.5  |
| Phase-failure sensitivity  |   |          |   | IEC/EN 60947-4-1, VDE 0660 Part 102   |
| Explosion protection (according to ATEX 94/9/EC)   |   |          |   |  PTB 10, ATEX 3013, Ex II(2) GD<br>Observe manual MNO3402003Z-DE/EN. |
| <b>Notes</b> Overload trigger: tripping class 10 A<br>Can be snapped on to IEC/EN 60715 top-hat rail with 7.5 or 15 mm height. |   |          |   |   |

**Technical data**

|                     |  |    |  |  |
|---------------------|--|----|--|--|
| <b>General</b>      |  |    |  |  |
| Standards           |  |    |  | IEC/EN 60947, VDE 0660, UL, CSA  |
| Climatic proofing   |  |    |  | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30 |
| Ambient temperature |  |    |  |  |
| Storage             |  | °C |  | - 40 - 80  |
| Open                |  | °C |  | -25 - +55  |
| Enclosed            |  | °C |  | - 25 - 40  |

|   |  |                 |   |
|---|--|-----------------|---|
| Mounting position   |  |                 |  |
| Direction of incoming supply  |  |                 | as required   |
| Degree of protection  |  |                 |   |
| Device  |  |                 | IP20  |
| Terminations  |  |                 | IP00  |
| Protection against direct contact when actuated from front (EN 50274)     |  |                 | Finger and back-of-hand proof   |
| Mechanical shock resistance half-sinusoidal shock 10 ms to IEC 60068-2-27 |  | g               | 25  |
| Altitude  |  | m               | Max. 2000   |
| Terminal capacity main cable  |  |                 |   |
| Screw terminals   |  |                 |   |
| Solid   |  | mm <sup>2</sup> | 1 x (1 - 6)<br>2 x (1 - 6)  |
| Flexible with ferrule to DIN 46228  |  | mm <sup>2</sup> | 1 x (1 - 6)<br>2 x (1 - 6)  |
| Solid or stranded   |  | AWG             | 18 - 10   |
| Stripping length  |  | mm              | 10  |
| Specified tightening torque for terminal screws                           |  |                 |   |
| Main cable  |  | Nm              | 1.7   |
| Control circuit cables  |  | Nm              | 1   |

### Main conducting paths

|   |             |               |                          |
|---|-------------|---------------|--------------------------|
| Rated impulse withstand voltage                         | $U_{imp}$   | V AC          | 6000                     |
| Overvoltage category/pollution degree                   |             |               | III/3                    |
| Rated operational voltage                               | $U_e$       | V AC          | 690                      |
| Rated uninterrupted current = rated operational current | $I_u = I_e$ | A             | 1                        |
| Rated frequency   | f           | Hz            | 40 - 60                  |
| Current heat loss (3 pole at operating temperature)     |             | W             | 5.33                     |
| Impedance per pole                                      |             | mΩ            | 1700                     |
| Lifespan, mechanical                                    | Operations  | $\times 10^6$ | 0.1                      |
| Lifespan, electrical (AC-3 at 400 V)                    |             |               |                          |
| Lifespan, electrical                                    | Operations  | $\times 10^6$ | 0.1                      |
| Max. operating frequency                                |             | Ops/h         | 40                       |
| Short-circuit rating                                    |             |               |                          |
| DC  |             |               |                          |
| Short-circuit rating                                    |             | kA            | 60                       |
| Notes   |             |               | up to 250 V              |
| Motor switching capacity                                |             |               |                          |
| AC-3 (up to 690V)                                       |             | A             | 1                        |
| DC-5 (up to 250V)                                       |             | A             | 1 (3 contacts in series) |

### Trip blocks

|   |  |              |  |
|---|--|--------------|--|
| Temperature compensation                              |  |              |  |
| to IEC/EN 60947, VDE 0660                             |  | °C           | - 5 ... 40                             |
| Operating range                                       |  | °C           | - 25 ... 55                            |
| Temperature compensation residual error for T > 40 °C |  |              | ≤ 0.25 %/K                             |
| Setting range of overload releases                    |  | $\times I_u$ | 0.6 - 1                                |
| short-circuit release                                 |  |              | Basic device, fixed: 15.5 $\times I_u$ |
| Short-circuit release tolerance                       |  |              | ± 20%                                  |
| Phase-failure sensitivity                             |  |              | IEC/EN 60947-4-1, VDE 0660 Part 102    |

### Rating data for approved types

|                      |  |    |   |
|----------------------|--|----|---|
| Switching capacity   |  |    |   |
| Maximum motor rating |  |    |   |
| Three-phase          |  |    |   |
| 200 V<br>208 V       |  | HP | Hinweis: Motorleistung in diesem Bereich nach Bemessungsstrom berechnen.<br>Angegebene Werte nach NEC Table 430-150 |

|  |      |   |
|--|------|---|
| 230 V<br>240 V                                 | HP   | Hinweis: Motorleistung in diesem Bereich nach Bemessungsstrom berechnen.<br>Angegebene Werte nach NEC Table 430-150 |
| 460 V<br>480 V                                 | HP   | Hinweis: Motorleistung in diesem Bereich nach Bemessungsstrom berechnen.<br>Angegebene Werte nach NEC Table 430-150 |
| 575 V<br>600 V                                 | HP   | Hinweis: Motorleistung in diesem Bereich nach Bemessungsstrom berechnen.<br>Angegebene Werte nach NEC Table 430-150 |
| Short Circuit Current Rating, type E           | SCCR |   |
| 240 V  | kA   | 65  |
| 480 Y / 277 V                                  | kA   | 65  |
| 600 Y / 347 V                                  | kA   | 50  |
| Accessories required                           |      | BK25/3-PKZ0-E   |
| Short Circuit Current Rating, group protection | SCCR |   |
| 600 V High Fault                               |      |   |
| SCCR (fuse)                                    | kA   | 50  |
| max. Fuse                                      | A    | 600   |
| SCCR (CB)                                      | kA   | 50  |
| max. CB  | A    | 600   |

## Design verification as per IEC/EN 61439

|  |            |    |  |
|--|------------|----|--|
| Technical data for design verification   |            |    |  |
| Rated operational current for specified heat dissipation   | $I_n$      | A  | 1  |
| Heat dissipation per pole, current-dependent   | $P_{vid}$  | W  | 1.78   |
| Equipment heat dissipation, current-dependent  | $P_{vid}$  | W  | 5.33   |
| Static heat dissipation, non-current-dependent   | $P_{vs}$   | W  | 0  |
| Heat dissipation capacity  | $P_{diss}$ | W  | 0  |
| Operating ambient temperature min.   |            | °C | -25  |
| Operating ambient temperature max.   |            | °C | 55   |
| IEC/EN 61439 design verification   |            |    |  |
| 10.2 Strength of materials and parts   |            |    |  |
| 10.2.2 Corrosion resistance  |            |    |  |
|  |            |    | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |            |    |  |
|  |            |    | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |            |    |  |
|  |            |    | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |            |    |  |
|  |            |    | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |            |    |  |
|  |            |    | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |            |    |  |
|  |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |            |    |  |
|  |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |            |    |  |
|  |            |    | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |            |    |  |
|  |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |            |    |  |
|  |            |    | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |            |    |  |
|  |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |            |    |  |
|  |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |            |    |  |
|  |            |    | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |            |    |  |
|  |            |    | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |            |    |  |
| 10.9.2 Power-frequency electric strength   |            |    |  |
|  |            |    | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |            |    |  |
|  |            |    | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |            |    |  |
|  |            |    | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |            |    |  |
|  |            |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |            |    |  |
|  |            |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |            |    |  |
|  |            |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |            |    |  |
|  |            |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Motor protection circuit-breaker (EC000074)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Motor protection circuit-breaker (ecl@ss10.0.1-27-37-04-01 [AGZ529016])

|  |    |  |
|--|----|--|
| Overload release current setting                                   | A  | 0.63 - 1                                 |
| Adjustment range undelayed short-circuit release                   | A  | 15.5 - 15.5                              |
| With thermal protection  |    | Yes                                      |
| Phase failure sensitive  |    | Yes                                      |
| Switch off technique   |    | Thermomagnetic                           |
| Rated operating voltage  | V  | 690 - 690                                |
| Rated permanent current I <sub>u</sub>                             | A  | 1  |
| Rated operation power at AC-3, 230 V                               | kW | 0.12                                     |
| Rated operation power at AC-3, 400 V                               | kW | 0.25                                     |
| Type of electrical connection of main circuit                      |    | Screw connection                         |
| Type of control element  |    | Turn button                              |
| Device construction  |    | Built-in device fixed built-in technique |
| With integrated auxiliary switch                                   |    | No                                       |
| With integrated under voltage release                              |    | No                                       |
| Number of poles  |    | 3  |
| Rated short-circuit breaking capacity I <sub>cu</sub> at 400 V, AC | kA | 150                                      |
| Degree of protection (IP)  |    | IP20                                     |
| Height   | mm | 93                                       |
| Width  | mm | 45                                       |
| Depth  | mm | 76                                       |


## Approvals

|                                      |  |  |
|--------------------------------------|--|--|
| Product Standards                    |  | IEC/EN 60947-4-1; UL 60947-4-1; CSA - C22.2 No. 60947-4-1-14; CE marking                 |
| UL File No.                          |  | E36332   |
| UL Category Control No.              |  | NLRV   |
| CSA File No.                         |  | 165628   |
| CSA Class No.                        |  | 3211-05  |
| North America Certification          |  | UL listed, CSA certified   |
| Specially designed for North America |  | No   |
| Suitable for                         |  | Branch circuit: Manual type E if used with terminal, or suitable for group installations |

## Characteristics




- 1: Standard auxiliary contact
- 2: Trip-indicating auxiliary contact
- 3: Shunt releases, undervoltage releases

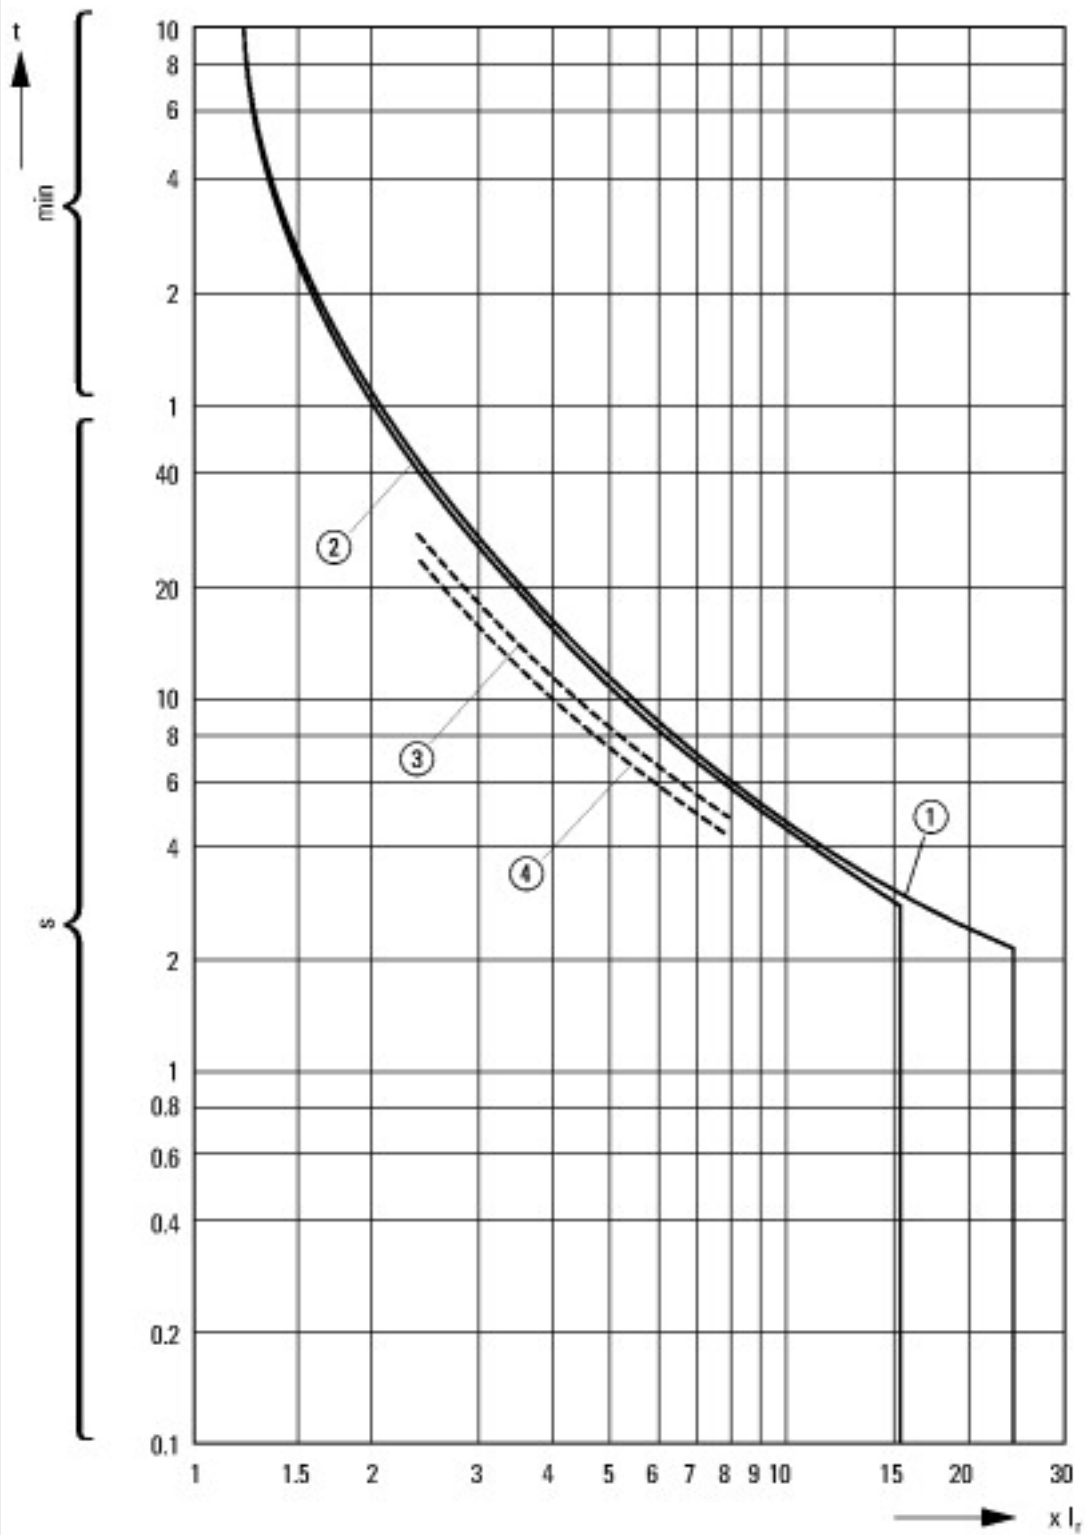

Tripping characteristics motor circuit breaker PKZM0-..., PKZM01

- 1: Minimum level, 3-phase
- 2: Maximum level, 3-phase
- 3: Minimum marker, 2-phase
- 4: Highest marker, 2-phase

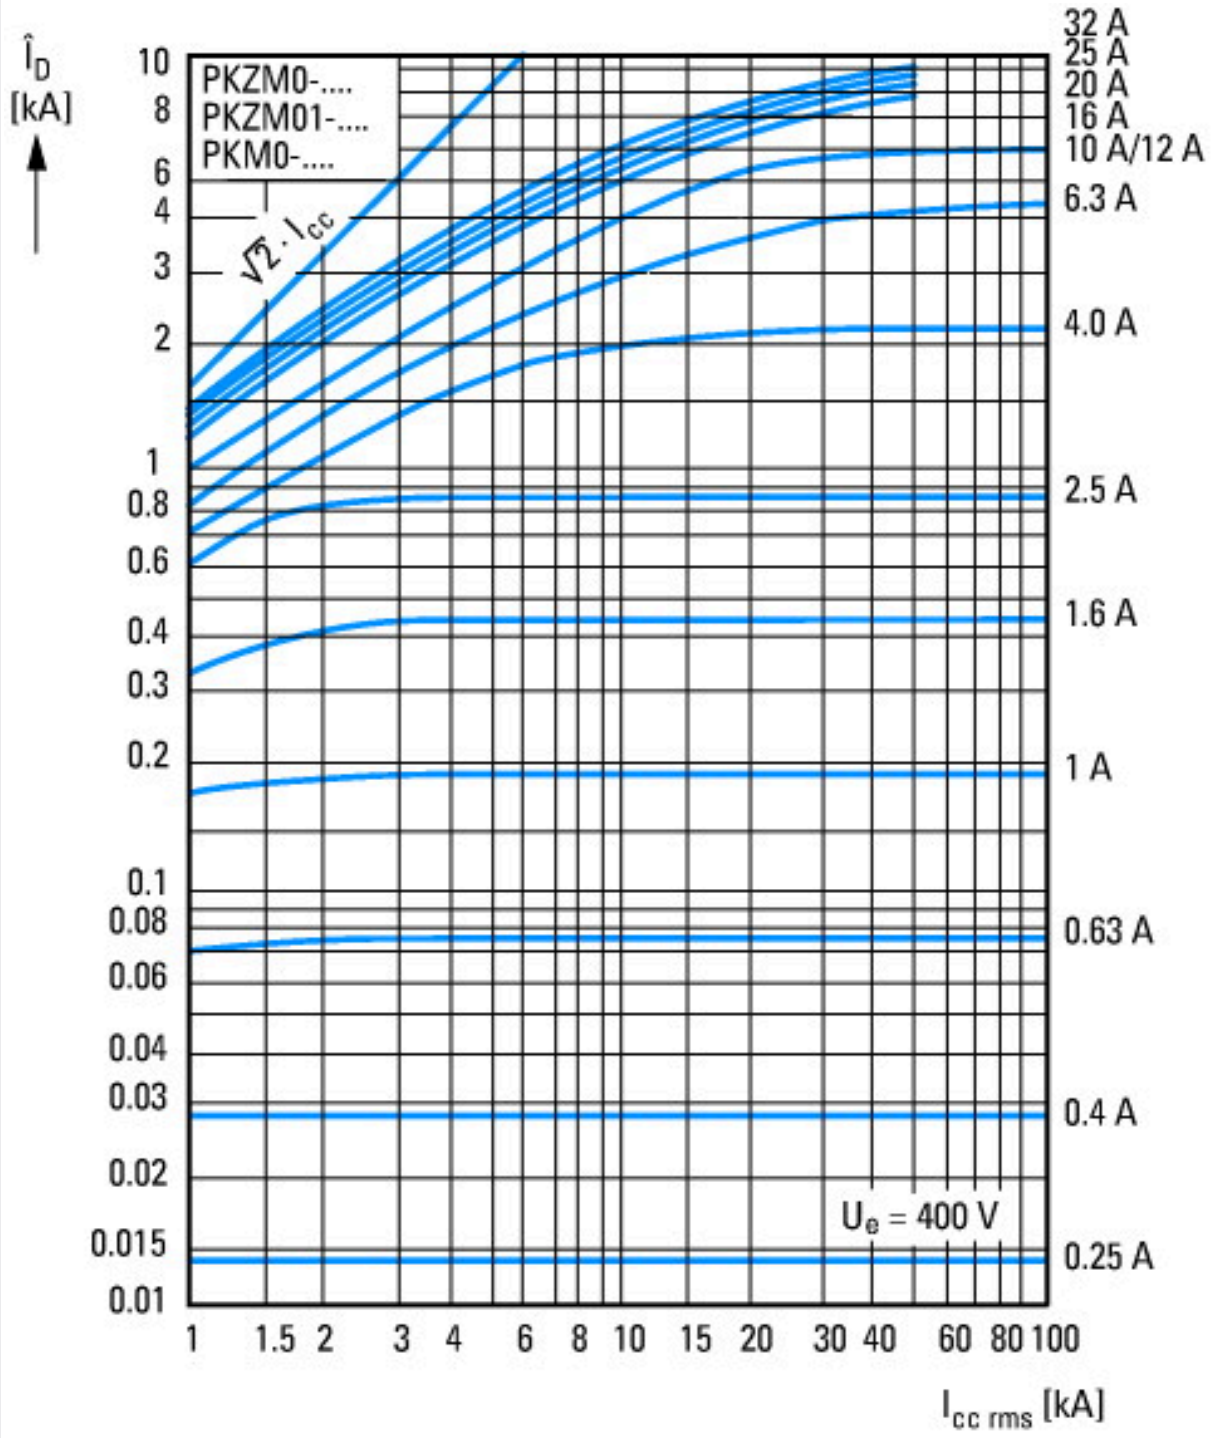


Let-through current





① 1 half-cycle  
 Let-through energy


## Dimensions

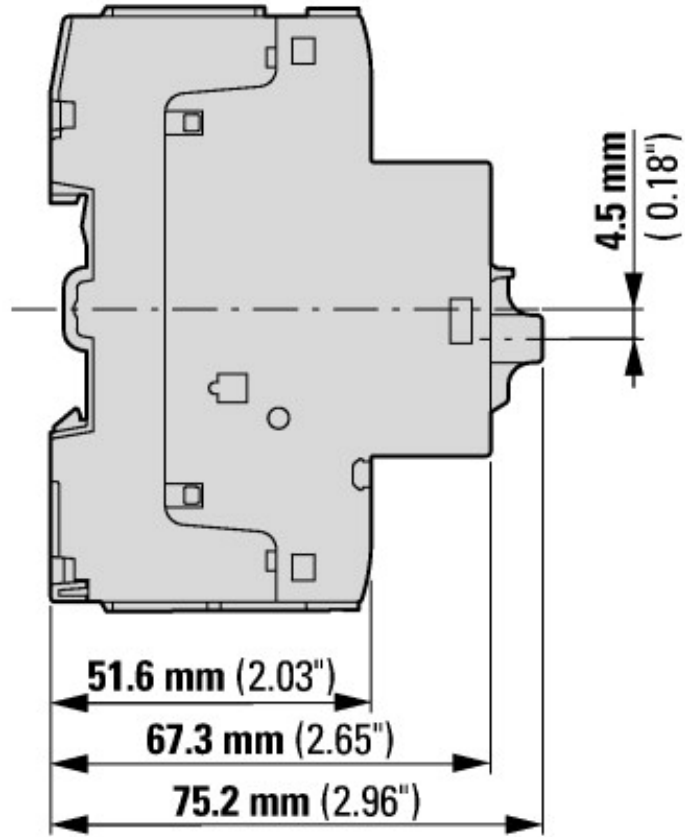

Motor-protective circuit-breaker with standard auxiliary contact  
 PKZM0-...(+NHI-E-...-PKZ0)  
 PKZM0-...-T(+NHI-E-...-PKZ0)  
 PKM0-...(+NHI-E-...-PKZ0)

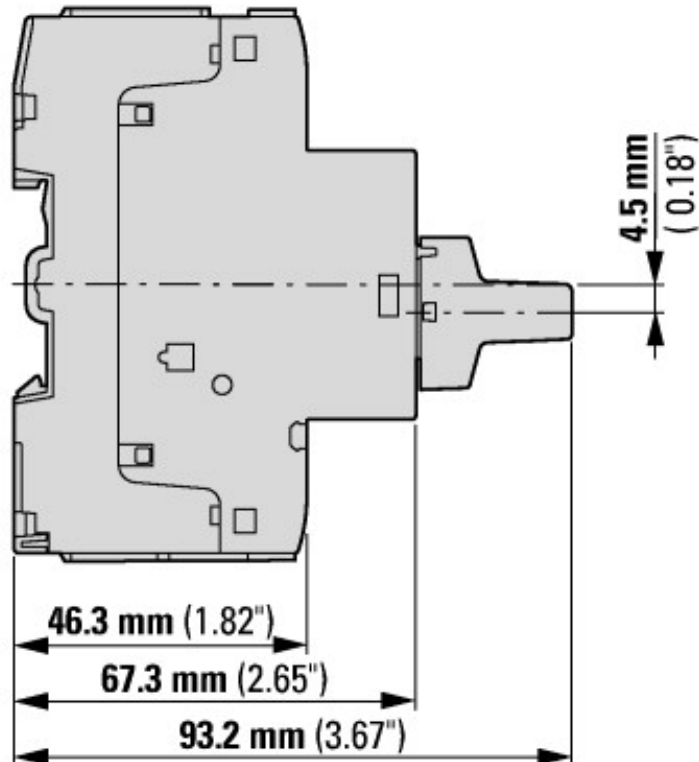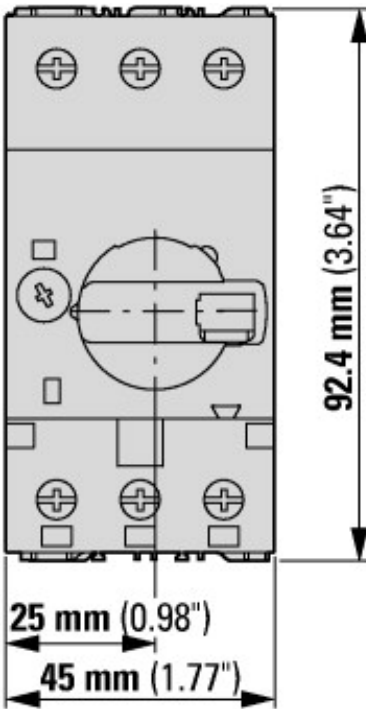

Motor-protective circuit-breakers with lockable rotary handles  
 PKZM0-...+AK-PKZ0

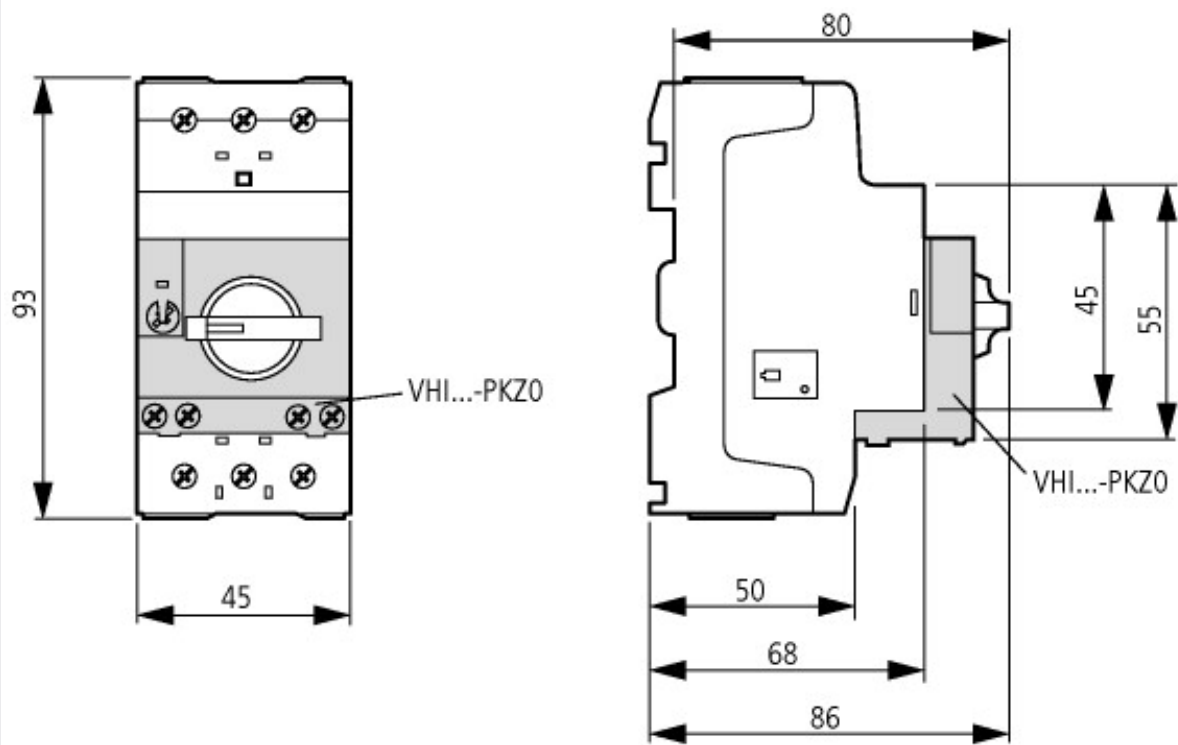

Motor-protective circuit-breakers with early-make auxiliary contacts  
PKZM0-...+VHI-...-PKZ0

## Additional product information (links)

### IL03407011Z (AWA1210-1925) Motor-protective circuit-breaker

IL03407011Z (AWA1210-1925) Motor-protective circuit-breaker [ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL03407011Z2018\\_04.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407011Z2018_04.pdf)

### 'IL03402034Z (AWA121-1945) Motor-protective circuit-breaker, Starter

'IL03402034Z (AWA121-1945) Motor-protective circuit-breaker, Starter [ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL03402034Z2018\\_06.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03402034Z2018_06.pdf)

### MN03402003Z (AWB1210-1458) PKZM0 motor-protective circuit-breakers, overload monitoring of Ex e motors

MN03402003Z (AWB1210-1458) PKZM0 motor-protective circuit-breakers, overload monitoring of Ex e motors - Deutsch / English [ftp://ftp.moeller.net/DOCUMENTATION/AWB\\_MANUALS/MN03402003Z\\_DE\\_EN.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN03402003Z_DE_EN.pdf)

EC prototype test certification PTB (German National Institute of Natural and Engineering Sciences) 10 ATEX 3013 [http://intranet.moeller.net/technik\\_daten/file/produkt\\_deklarationen/file/approbationen/00001731.pdf](http://intranet.moeller.net/technik_daten/file/produkt_deklarationen/file/approbationen/00001731.pdf)

Schaltvermögen [https://de.ecat.eaton.com/flip-cat/?edition=MOTCONT1\\_DE#page\\_3/44](https://de.ecat.eaton.com/flip-cat/?edition=MOTCONT1_DE#page_3/44)

Motor starters and "Special Purpose Ratings" for the North American market [http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct\\_3258146.pdf](http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf)

Busbar Component Adapters for modern Industrial control panels [http://www.moeller.net/binary/ver\\_techpapers/ver960en.pdf](http://www.moeller.net/binary/ver_techpapers/ver960en.pdf)